

GROUP 17 BRACKETS FOR HANGING SYSTEMS




Adjustable bracket


| Item | Dimension in mm | | | Weight/each | Pcs per box |
|------|-----------------|----|----|-------------|-------------|
| | L1 | L2 | L3 | | |

Adjustable bracket for wall fixing, provided with bolts and accessories. Made of galvanised steel and painted with polyester powder for external surfaces with RAL 9002 colour.



| | | | | | |
|------|-----|-----|-----|----------|---|
| STM | 850 | 450 | 155 | kg 4,500 | 1 |
| STM2 | 750 | 380 | 90 | kg 4,000 | 1 |

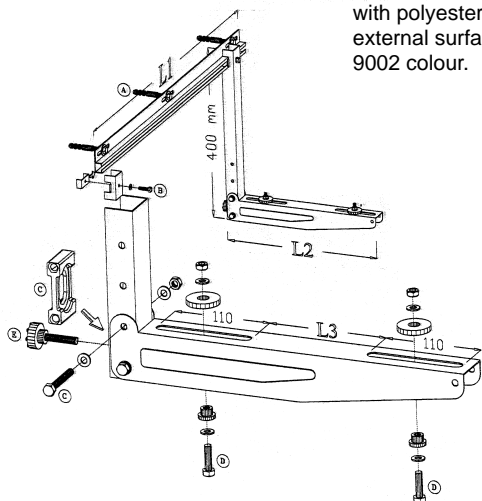

On request stainless steel bolts.




Capacity load calculated on 1/3 of the ultimate strength in accordance with CNR-UNI 10011-73 Standards and referring to a single bracket.

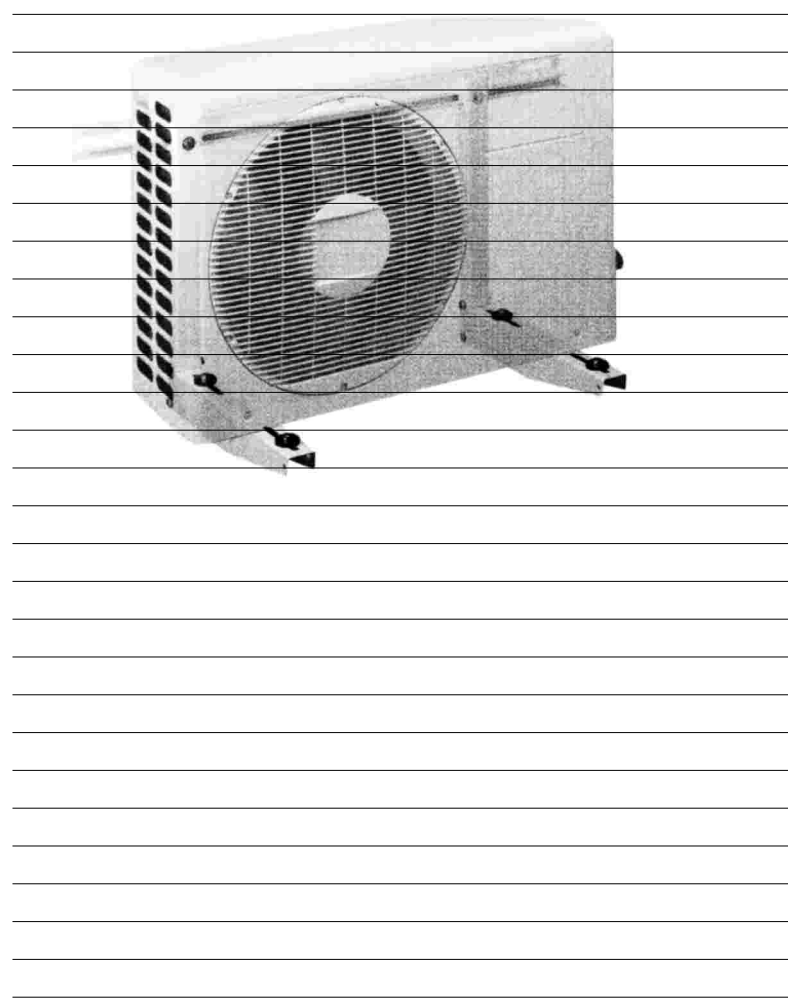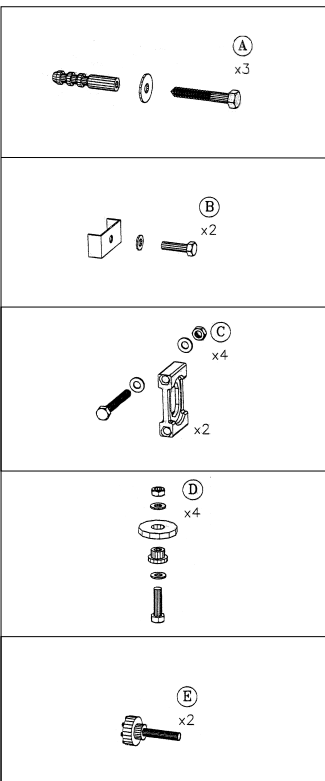

GROUP 17 BRACKETS FOR HANGING SYSTEMS




| Single painted bracket | Item | Dimension in mm | | | Weight/each | Pcs per box |
|------------------------|------|-----------------|----|----|-------------|-------------|
| | | L1 | L2 | L3 | | |

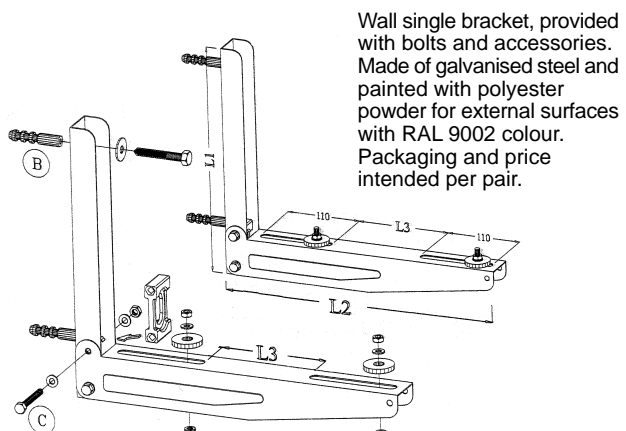


Wall single bracket, provided with bolts and accessories. Made of galvanised steel and painted with polyester powder for external surfaces with RAL 9002 colour. Packaging and price intended per pair.


| | | | | | |
|--------|-----|-----|-----|----------|---|
| STM 38 | 365 | 380 | 90 | kg 3,000 | 1 |
| STM 45 | 365 | 450 | 155 | kg 3,300 | 1 |



Capacity load calculated on 1/3 of the ultimate strength in accordance with CNR-UNI 10011-73 Standards and referring to a single bracket.

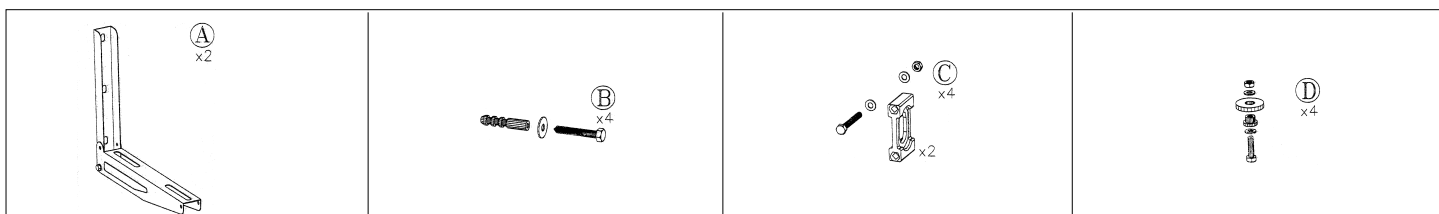


| Single stainless steel bracket | Item | Dimension in mm | | | Weight/each | Pcs per box |
|--------------------------------|------|-----------------|----|----|-------------|-------------|
| | | L1 | L2 | L3 | | |

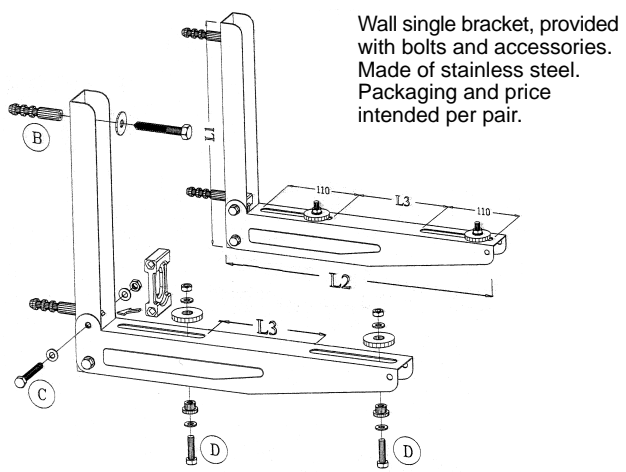


Wall single bracket, provided with bolts and accessories. Made of stainless steel. Packaging and price intended per pair.

| | | | | | |
|---------|-----|-----|-----|----------|---|
| STM 38I | 365 | 380 | 90 | kg 3,000 | 1 |
| STM 45I | 365 | 450 | 155 | kg 3,300 | 1 |



Capacity load calculated on 1/3 of the ultimate strength in accordance with CNR-UNI 10011-73 Standards and referring to a single bracket.


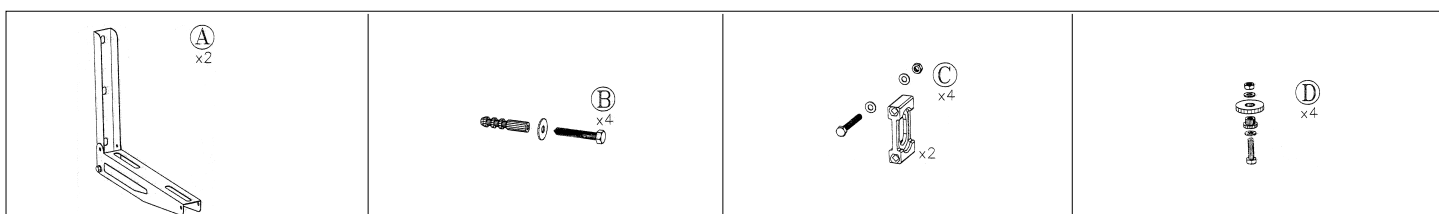


GROUP 17 BRACKETS FOR HANGING SYSTEMS



Single welded bracket

Wall single bracket, welded. Made of galvanised steel and painted with polyester powder for external surfaces with RAL 9002 colour.

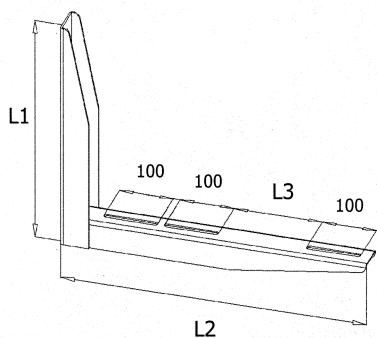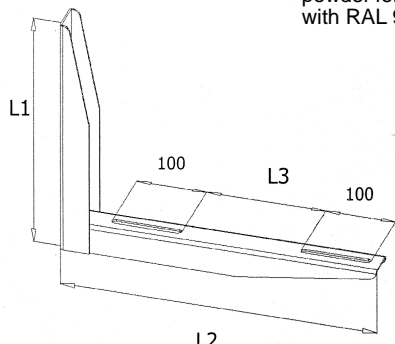


| Item | Dimension in mm | | | Weight/each | Pcs per box. |
|---------|-----------------|-----|-----|-------------|--------------|
| | L1 | L2 | L3 | | |
| STM 38L | 300 | 380 | 100 | Kg 1,200 | 6 |
| STM 45L | 350 | 450 | 170 | Kg 1,450 | 6 |
| STM 50L | 400 | 500 | 145 | Kg 1,950 | 6 |

Bracket sold one by one.

Ceiling bracket

Bracket for ceiling fixing, provided with bolts and accessories. Made of galvanised steel and painted with polyester powder for external surfaces with RAL 9002 colour.

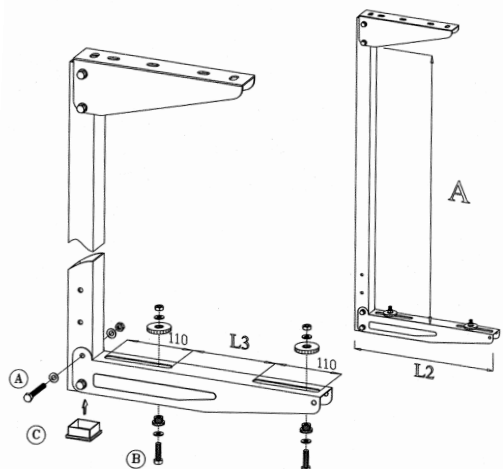

| Item | Dimension in mm | | | Weight/each | Pcs per box |
|-------|-----------------|-----|-----|-------------|-------------|
| | A max | L2 | L3 | | |
| STM 3 | 570 | 380 | 90 | Kg 8,000 | 1 |
| STM 4 | 840 | 450 | 155 | Kg 9,850 | 1 |



GROUP 17 BRACKETS FOR HANGING SYSTEMS






| Roof fixing bracket | Item | Dimension in mm | Weight/each | Pcs per box |
|---------------------|------|-----------------|-------------|-------------|
|---------------------|------|-----------------|-------------|-------------|

Roof fixing bracket, provided with bolts and accessories. Adjustable in accordance with the slope of the roof from 10° to 40°. Made of galvanised steel and painted with polyester powder for external surfaces with RAL 9002 colour.

| | | | |
|------|-----------|-----------|---|
| STM5 | 450 x 850 | Kg. 7,400 | 1 |
|------|-----------|-----------|---|

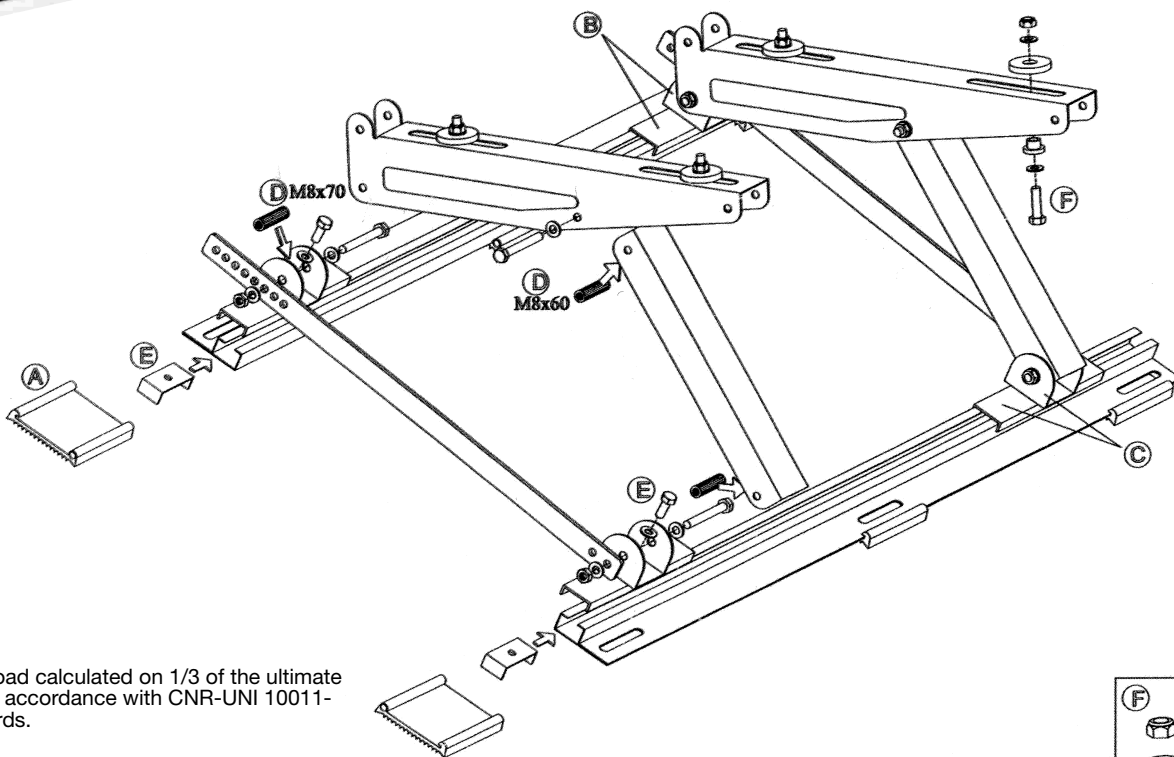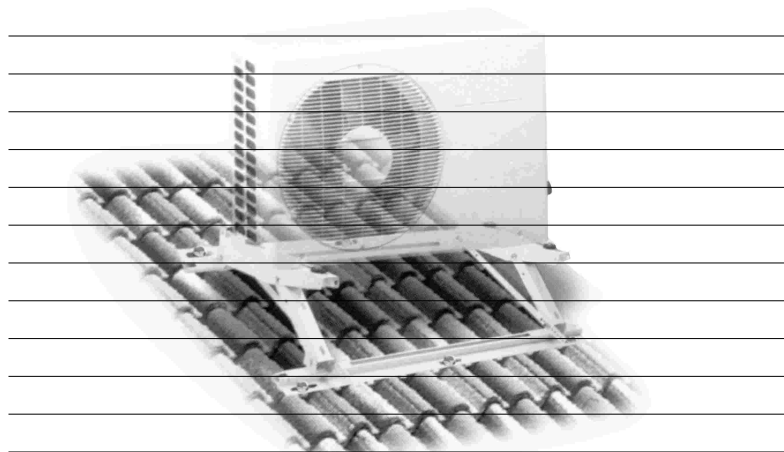

Capacity load calculated on 1/3 of the ultimate strength in accordance with CNR-UNI 10011-73 Standards.

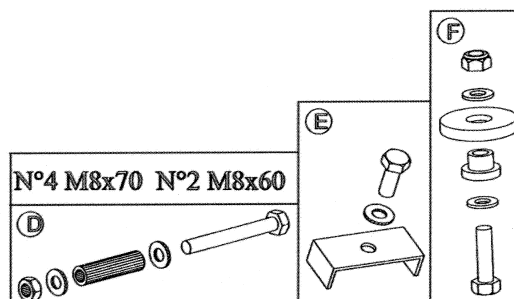

GROUP 17 BRACKETS FOR HANGING SYSTEMS




| Brackets | Item | Length in mm | Finishing | Weight/each | Pcs per box |
|----------|------|--------------|-----------|-------------|-------------|
|----------|------|--------------|-----------|-------------|-------------|



Steel supporting bracket, thickness 2 mm for fixing on wall or on structural steel. Vertical rod with h= 212mm and with slotted holes 16x9 mm. Horizontal arm with slotted holes of 16x7 mm.


| | | | | |
|----------|-----|-------------------|----------|----|
| ME 150ZE | 150 | Electrogalvanised | Kg 0,400 | 25 |
| ME 240ZE | 240 | Electrogalvanised | Kg 0,515 | 15 |
| ME 330ZE | 330 | Electrogalvanised | Kg 0,615 | 10 |
| ME 150ZA | 150 | Hot-galvanised | Kg 0,400 | 25 |
| ME 240ZA | 240 | Hot-galvanised | Kg 0,515 | 15 |
| ME 330ZA | 330 | Hot-galvanised | Kg 0,615 | 10 |

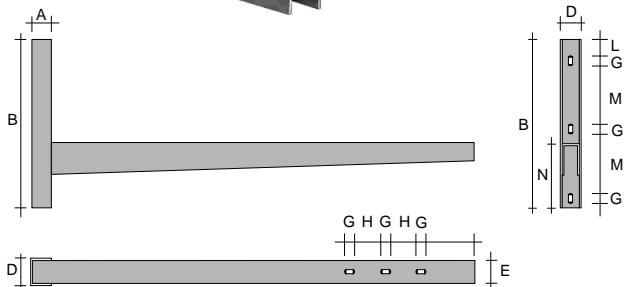

- A 20 mm
- B 212 mm
- D 40 mm
- E 34 mm
- G 16 mm
- H 28 mm
- L 8 mm
- M 73 mm
- N 68 mm


On request it is possible to have different measures or finishings.

| Brackets | Item | Length in mm | Finishing | Weight/each | Pcs per box |
|----------|------|--------------|-----------|-------------|-------------|
|----------|------|--------------|-----------|-------------|-------------|

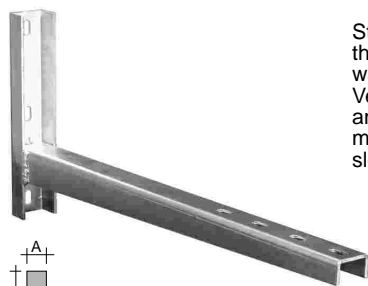

Steel supporting bracket, thickness 2 mm for fixing on wall or on structural steel. Vertical rod with h= 212mm and with slotted holes 16x9 mm. Horizontal arm with slotted holes of 16x7 mm.

| | | | | |
|----------|-----|-------------------|----------|---|
| ME 450ZE | 450 | Electrogalvanised | Kg 1,215 | 8 |
| ME 560ZE | 560 | Electrogalvanised | Kg 1,480 | 6 |
| ME 450ZA | 450 | Hot-galvanised | Kg 1,215 | 8 |
| ME 560ZA | 560 | Hot-galvanised | Kg 1,480 | 6 |

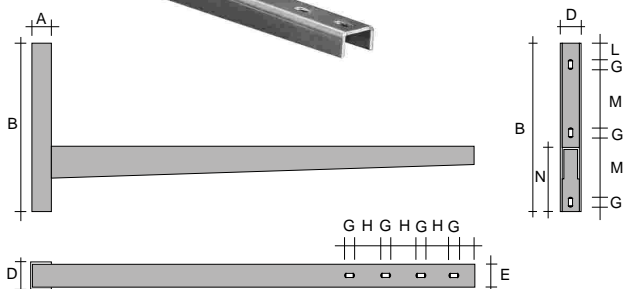

- A 20 mm
- B 212 mm
- D 42 mm
- E 34 mm
- G 16 mm
- H 28 mm
- L 10 mm
- M 73 mm
- N 75 mm


On request it is possible to have different measures or finishings.

GROUP 17 SUPPORTING BRACKETS FOR PROJECTOR




Wall brackets

Item Length in mm Finishing Weight/each Pcs per box



Steel supporting bracket for projector, thickness 2 mm. Wall fixing with plate of 200 x 200 mm and 4 holes Ø 10 mm to anchor it.

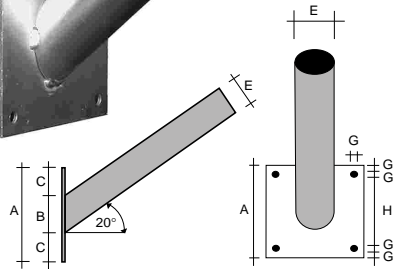


- A 200 mm
- B 58 mm
- C 46 mm
- E 60 mm
- G 10 mm
- H 10 mm

*** Running out of stock


| | | | | |
|--------------|-----|-------------------|----------|----|
| ST 300ZE *** | 300 | Electrogalvanised | Kg 1,260 | 10 |
| ST 400ZE *** | 400 | Electrogalvanised | Kg 1,560 | 5 |
| ST 300ZA | 300 | Hot-galvanised | Kg 1,260 | 10 |
| ST 400ZA | 400 | Hot-galvanised | Kg 1,560 | 5 |

Angle wall brackets

Item Length in mm Finishing Weight/each Pcs per box



Steel supporting bracket for projector, thickness 2 mm. Angle wall fixing with plate of 200 x 200 mm and 4 holes Ø 10 mm to anchor it.

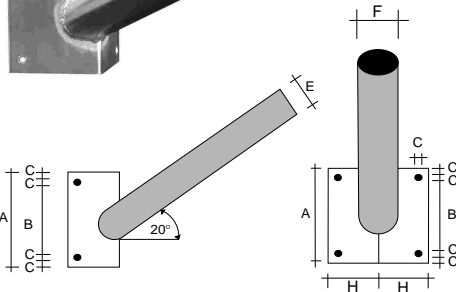


- A 200 mm
- B 110 mm
- C 10 mm
- E 60 mm
- F 60 mm
- H 75 mm

*** Running out of stock

| | | | | |
|--------------|-----|-------------------|----------|----|
| ST 175ZE *** | 175 | Electrogalvanised | Kg 1,250 | 10 |
| ST 330ZE *** | 330 | Electrogalvanised | Kg 1,710 | 4 |
| ST 175ZA | 175 | Hot-galvanised | Kg 1,250 | 10 |
| ST 330ZA | 330 | Hot-galvanised | Kg 1,710 | 4 |

Head pole

Item Length in mm Weight/each Pcs per box.
A B C



Hot-galvanised single head pole, appropriate for tapered or cylindrical poles with head diam. 60 mm. Provided with two 10 MA torquing screws.



| | | | | | |
|-------|----|----|-----|----------|---|
| TPC 1 | 70 | 60 | 200 | Kg 1,615 | 1 |
| TPC 2 | 70 | 45 | 200 | Kg 1,300 | 1 |